
DIGIL/M, □□□□□□□□□, □□□□□□□□□□

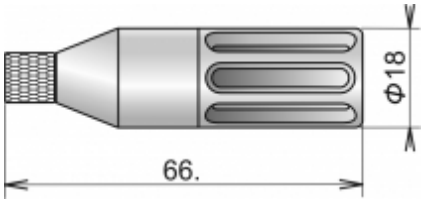

□□: DIGIL/E

□□□□□□□□□ELKA□□□□□□

□□□□□□□□□.

□□□□□□□□□□□□

□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□

□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□

□□□□

Temperature measurement range	-10 to +70 °C
Temperature measurement accuracy	± 0.4 °C
Temperature humidity measurement range (without condensation)	0 to 100°RH
Relative humidity measurement accuracy	± 2.5 % RH
IP protection	Probe is covered with stainless steel mesh filter with IP40 protection. Filtering ability 0.025 mm